



## Fit

Roller shade with cassette and side guides that attaches directly to door and window frames.

	<b>Flat channel</b>	<b>"U"- Shaped channel</b>
<b>Maximum width</b>	1600 mm	1600 mm
<b>Maximum height</b>	2500 mm	2500 mm
<b>Color</b>	<input type="checkbox"/> White RAL 9016, <input type="checkbox"/> Black RAL 9011 <input type="checkbox"/> Brown RAL 8017, <input type="checkbox"/> Anodized aluminum	
<b>Operating systems</b>	Chain	Chain
<b>Installation</b>	Adhesive on the frame (front installation)	Adhesive on the frame (front installation)
<b>Options</b>	Safekids	Fabrics from the Neolux® collection Safekids

# Solutions with no screws or perforations

## Fit roller shade

### FLAT CHANNEL

Enables the shade to fit perfectly into the frame. Recommended for totally flat surfaces free of moldings and cross bars.

### "U"-SHAPED CHANNEL

Can be used on frames with small moldings or cross bars, on the glass section (flat surface). In comparison with others, this model does not require as much precision when taking measurements.



## Matching colors

Cassette, side guides and bottom bar available in 4 different colors: white, black, brown and anodized aluminum.



Coordinate them with our wide range of decorative and technical fabrics.

## Bottom bar

Visible bottom bar with a soft weather strip below, which closes off the frame surface facilitating the semi-blackout effect with the flat channel.



## Semi-blackout option

The FIT shade can stop light significantly thanks to the Blackout fabric range, in different colors and textures, and the side guides system.



## FIT-NEOLUX




### Wide range of fabrics

More than 30 references featuring different textures, colors and degrees of transparency.

### Fit-Neolux bottom bar

Hidden bottom bar that brings together simplicity and functionality NIGHT & DAY fabric to slide smoothly.

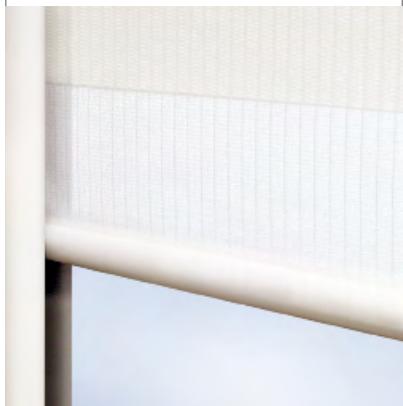

### Ultra-resistant adhesive tape without surface damaging

Perfect adhesion to the frame for windows and glass doors:

- Fits perfectly into the structure.
- No drilling. No holes.
- Ultra resistant 3M adhesive tape.



### Child Safety

Bandalux supplies a child safety system, that allows the chain to be attached to the wall preventing children from getting entangled in it.



#### Child safety chain retainer

It is the standard security device in the market served by default with your shades order.



#### Safekids

It is highly efficient as it cannot be taken apart or tampered with and guarantees that the chain will not detach from the wall preventing from strangulation.

## SERVED BY DEFAULT

CASSETTE AND FLAT CHANNEL	CASSETTE AND "U"-SHAPED CHANNEL	CHILD SAFETY CHAIN RETAINER	PROFILE COLORS	OTHER OPTIONS
			<input type="checkbox"/> White RAL 9016 <input checked="" type="checkbox"/> Brown RAL 8017 <input checked="" type="checkbox"/> Black RAL 9011 <input checked="" type="checkbox"/> Anodized aluminum	<b>SAFEKIDS</b> (CHILD SAFETY SYSTEM)  
FIT BOTTOM BAR	NEOLUX BOTTOM BAR	PROFILE WITH 3M ADHESIVE TAPE		
				
<small>① Not available for Neolux fabrics®.</small>	<small>② Only available for Neolux fabrics®.</small>		<small>③ If you do not indicate a different color on the order form or eBa, it will be served in white by default.</small>	


## TECHNICAL DATA

## MINIMUM AND MAXIMUM SIZES


Model	Operating system	Shade width		Shade height		Surface		% (Width / Height)
		Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	
FLAT CHANNEL	Chain	1600 mm	300 mm	2500 mm	300 mm	3,25 m <sup>2</sup>	0,15 m <sup>2</sup>	±0,2% / ±0,5%
"U"-SHAPED CHANNEL	Chain	1600 mm	300 mm	2500 mm	300 mm	3,25 m <sup>2</sup>	0,15 m <sup>2</sup>	±0,2% / ±0,5%

① \* In accordance with the european standard EN13120.


## CONTROLS HEIGHT

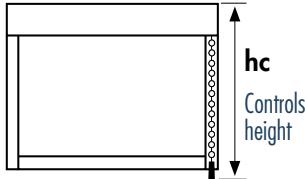	<b>CHAIN WITH CHILD SAFETY SYSTEM</b> The <b>Child Safety/Safekids</b> device must be positioned at a minimum height of 1,5m from the floor. To calculate the controls height (hc).								
	<b>CHAIN WITHOUT CHILD SAFETY SYSTEM</b> <b>Minimum calculation for hc: Shade height H x 0,50 + 50 mm</b>								
	The controls height will always be measured from the uppermost section of the shade (upper end of the cassette), to the lower part of the chain tensioner. Due to the development of the mechanism, the height of the control can never be lower than the result of the calculation.								
	<b>Example of calculation:</b> <table border="1"> <tr> <th>Shade height H</th> <th>Controls height hc (minimum)</th> </tr> <tr> <td>600 mm</td> <td>350 mm</td> </tr> <tr> <td>1200 mm</td> <td>650 mm</td> </tr> <tr> <td>1800 mm</td> <td>950 mm</td> </tr> </table>	Shade height H	Controls height hc (minimum)	600 mm	350 mm	1200 mm	650 mm	1800 mm	950 mm
Shade height H	Controls height hc (minimum)								
600 mm	350 mm								
1200 mm	650 mm								
1800 mm	950 mm								

## FLAT CHANNEL

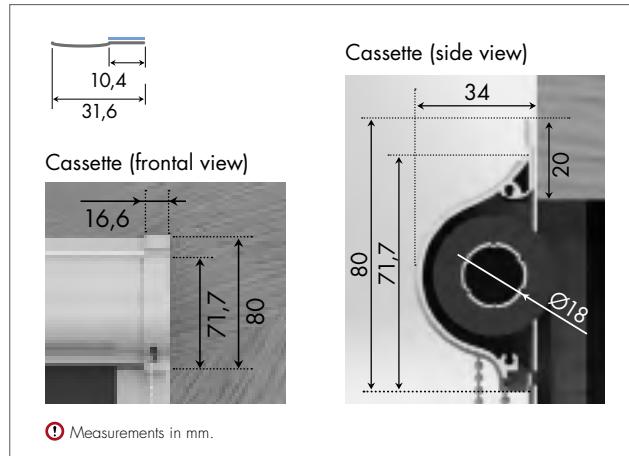

## "U"-SHAPED CHANNEL

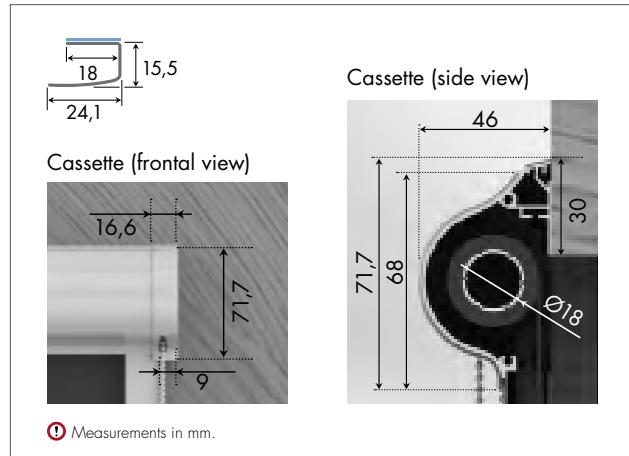

YES


NO

INSTALLATION ALLOWED

### CHECKING THE MEASUREMENTS:

(Images intended to serve as examples only)


**1** Minimum depth **10 mm**  
Minimum height **20 mm**

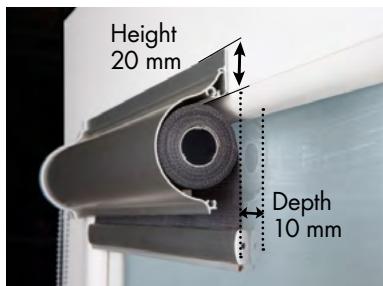

Install at **minimum 10 mm depth** in relation to the interior molding.


There must be at **least 20 mm height** at the top, from the molding upwards (flat surface).

**2** Minimum depth **10 mm**

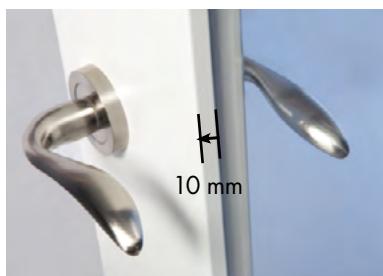

The molding should be at **least 10 mm wide**.


**3** Minimum space **11 mm**

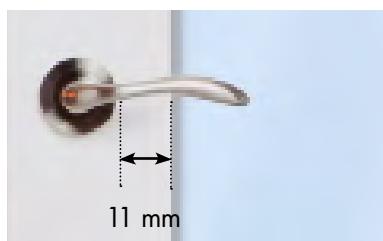

Minimum **space of 11 mm** between the doorknob and the edge of the inner molding (as long as the surface is flat).

### TAKING THE RIGHT MEASUREMENTS:

**!** The Fit System with Flat Channel can only be installed on flat surfaces, glass doors or windows with straight sides without moldings.

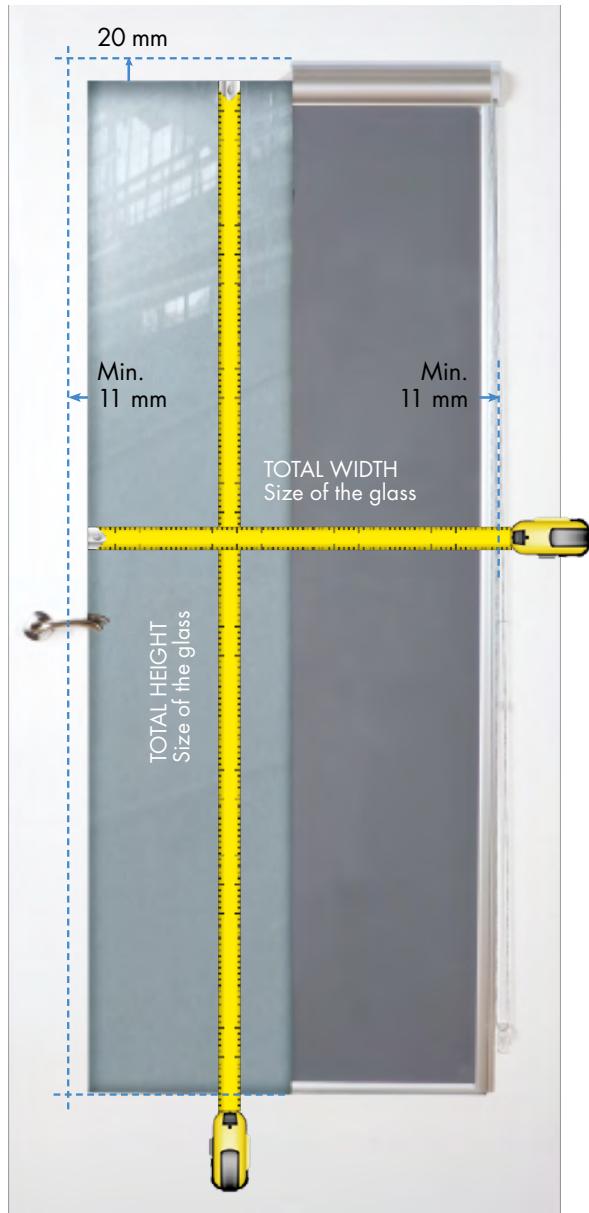

### ORDER:

The customer only has to provide the glass measurements. The Blind measurements delivered by Bandalux will include:

- **Upper section: Glass size +20mm**
- **Sides: Glass size +11mm on both sides.**
- **Lower section: Glass size**
- **Cassette width: Glass size +15mm on both sides.**

# Fit "U"-shaped channel

## TAKING MEASUREMENTS

INSTALLATION  
ALLOWED

YES

NO

### CHECKING THE MEASUREMENTS:

(Images intended to serve as  
examples only)


1 Minimum height **30 mm**  
(the cassette can be seen behind the door)

Optimum height **70 mm**




The height should be **70 mm** at the top, from the molding up, so that the cassette is not visible behind the door (flat surface).

2 Minimum depth **40 mm**

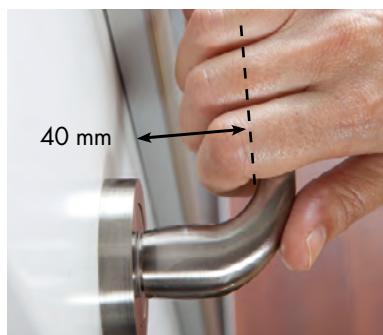

There should be **at least 40 mm** between the doorknob and the start of the door frame.

3 Minimum space **18 mm**

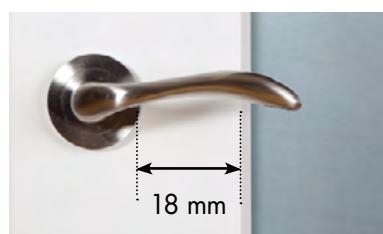


Minimum **space of 18 mm** between the doorknob and the start of the inner edge of the molding.

### TAKING THE RIGHT MEASUREMENTS:

! The Fit system with "U"-shaped Channel can be installed on flat surfaces, glass doors or windows with moldings and crossbars.

To obtain more concealment, it is necessary to increase the gap between the shade and the glass.

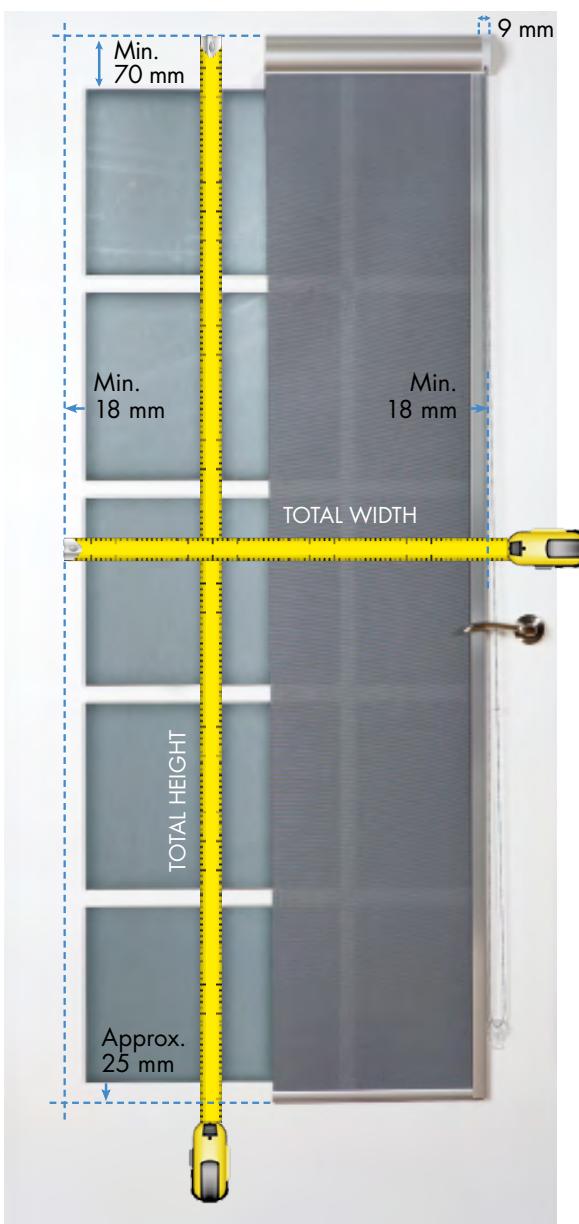

### ORDER:

Bandalux will supply the shades with the measurements provided by the customer. The cassette will have an additional width of 18 mm.

[contract.bandalux.com](http://contract.bandalux.com)

[bandalux.com](http://bandalux.com)