


VERANDA ZIP



BASIC SHINY PROFILES COLOURS

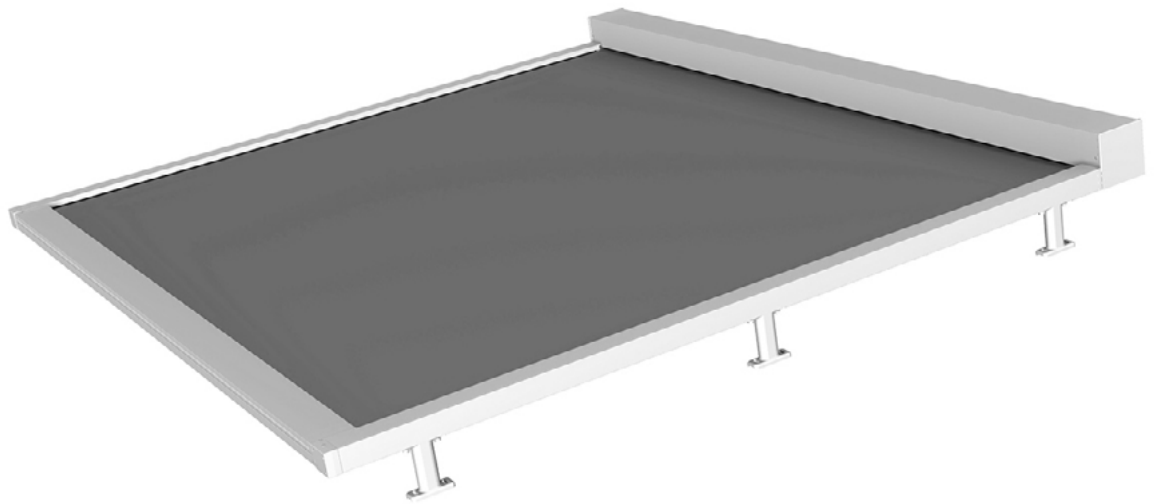

White
RAL 9010



Grey aluminum
RAL 9006



Anthracite textured
RAL 7016

OPERATING SYSTEMS



Motor

MAXIMUM WIDTH
400 cm

MAXIMUM HEIGHT
400 cm

SYSTEM ADVANTAGE

AWNINGS & VERANDAS

Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.




Flawless fabric retraction

The **rollertube*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

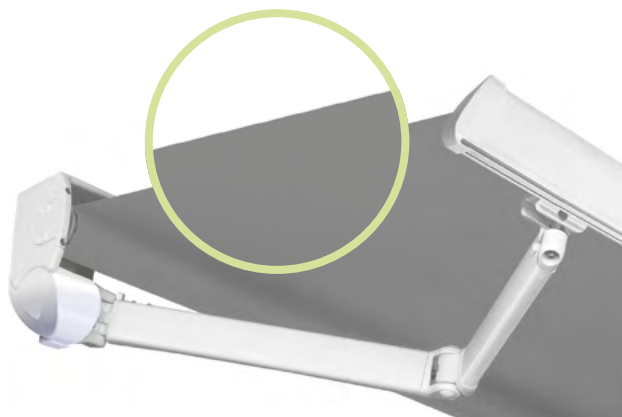

WITH

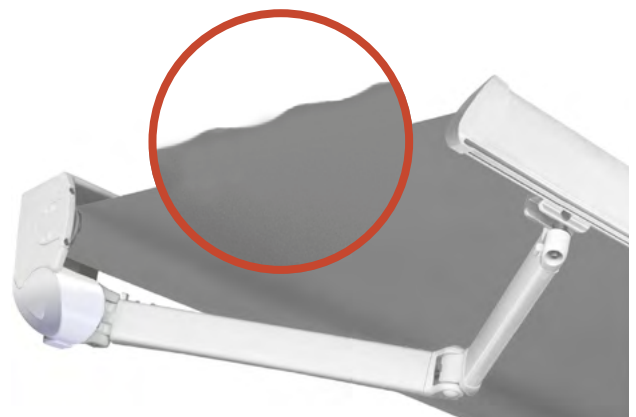

WITHOUT

Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.



Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



Quick and easy installation


Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.



VERANDA ZIP




Veranda con sistema de guías cremallera que ayuda a tensar el tejido y aporta una ocultación máxima. Ideal para cubrir jardines de invierno, techos de vidrio y todo tipo de cerramientos, tanto en posición vertical como horizontal. El tejido se recoge en un cajón de 130 mm mediante accionamiento a motor.

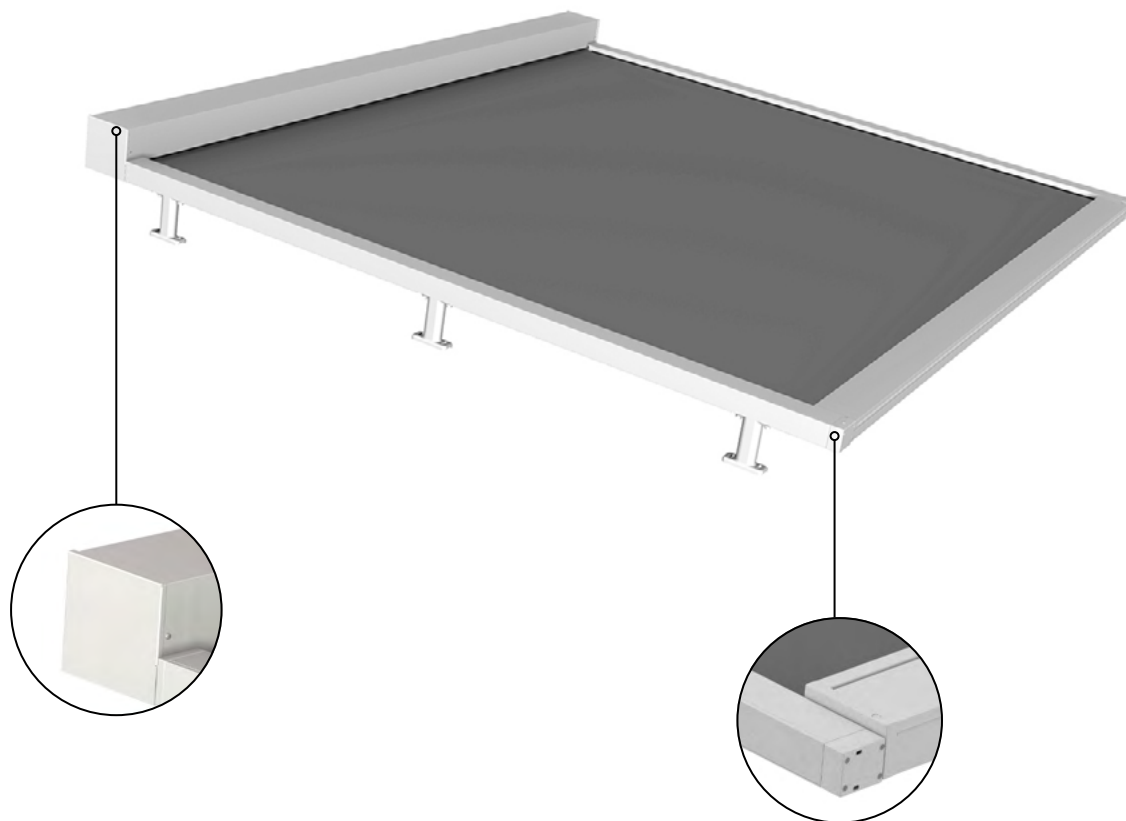


Dimensiones y detalles técnicos


Módulos vista trasera

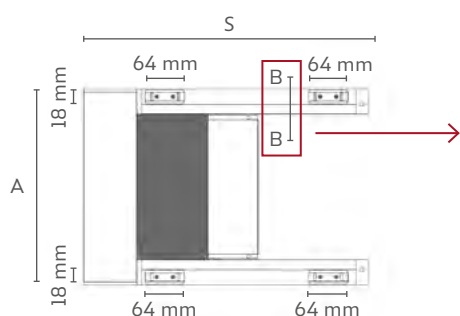

Módulos vista desde arriba

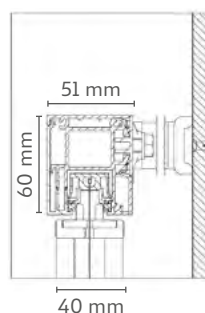

Módulos y guías

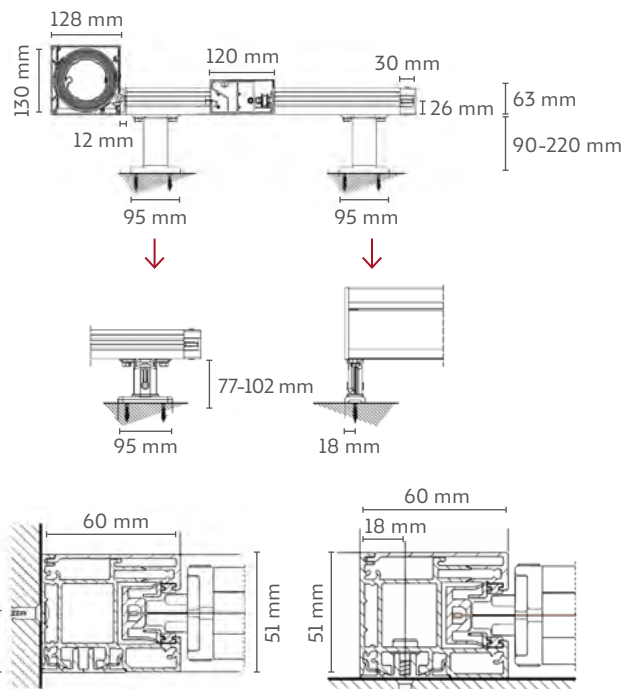


A: Ancho
S: Salida

VERANDA ZIP

OPTIONS

Standard configuration

Adjustable guide support*

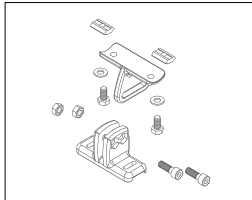

❗ * Incompatible with H2 installation

Basic shiny profiles colours

- White RAL 9010
- Grey aluminum RAL 9006
- Anthracite textured RAL 7016


Optional configuration

Other profiles colours


❗ More information and prices by [clicking here](#).

Optional configuration

Brackets



Adjustable guide support*
Ref. 1755081X



Inclinable and adjustable
guide support*
Ref. 1755082X

❗ * Incompatible with H2 installation

Motorization

Measurements in mm

WIDTH x PROJECTION	MOTOR		
300 x 3000 mm	WIRED	Somfy®	MAESTRIA 50 25/17
		Somfy®	MAESTRIA 50 35/17
	RADIO	Bandalux	R2 50 40/17
		Somfy® RTS	ALTUS 50 40/17
	RADIO IO	Somfy® IO	SUNILUS 50 40/17
400 x 4000 mm	WIRED	Bandalux	R2 50 50/12
		Somfy® RTS	ALTUS 50 50/12
	RADIO IO	Somfy® IO	SUNILUS 50 50/12

AUTOMATISMS	
06702000A	ELEGANCE 1 BIANCO
06702100A	ELEGANCE 4 BIANCO
06700970D	SITUAO 1 RTS PURE
06700881D	SITUAO 5 RTS PURE

BANDALUX